

# SALES SPECIFICATION SHEET

## AQUACARB 607C 8X30

Activated Carbon


Test	Specification		Calgon Carbon Test Method
	Min	Max	
ASH, wt%	-	1	ASTM D 2866
MOISTURE (AS PACKAGED), wt%	-	10	ASTM D 2867
EXTRACTABLE pH	6	8	ASTM D 3838
CARBON TETRACHLORIDE, wt%	50	-	ASTM D3467
IODINE NUMBER, mg/g	1000	-	ASTM D4607
HARDNESS NUMBER	95	-	ASTM D3802
DENSITY (APPARENT), mg/g	0.45	0.55	ASTM D2854
8 US MESH [2.36 mm], wt%	-	8	ASTM D 2862
< 30 US MESH [0.600 mm], wt%	-	5	ASTM D 2862

### Typical Properties:

THIS PRODUCT IS NOT INCLUDED IN THE SCOPE OF CCC'S QUALITY SYSTEM CERTIFIED TO ISO 9001.

NOTE: CCC'S Quality System elements are applied whenever possible.

**Calgon Carbon Corporation's activated carbon products are continuously being improved and changes may have taken place since this publication went to press. 19149-02/01/2010**

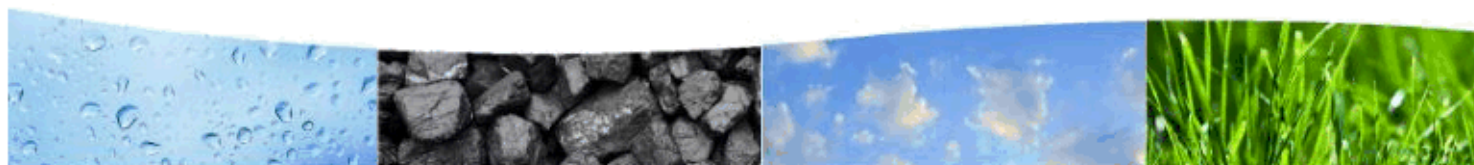

+1 800 422 7266 calgoncarbon.com

**CalgonCarbon**  
A Kuraray Company